



P.O. Box 515429
Dallas, Texas 75075
Ph: (972) 669-3390
Fax: (469) 241-0896
Email: oseicorp@msn.com
Web: www.osei.us

**Republic of Korea University of Seoul, University of Saskatchewan
and Baylor University Developed A Mesocosm Sediment Or
Shoreline Experimental Design/Study To Determine The Best
Shoreline Clean up Product/Process Available.**

The experimental mesocosm design utilized a gravel shoreline matrix, with a hard bottom. The 12 professors from 12 different University departments utilized a mesocosm that emulated tide, and various aspects of intertidal zones.

The experiment considered a number of variables with a scoring value defined as the SQT system. This system considered variable such as percent removal of oil, time, positive or adverse effects of the product/process, toxicological effects, and economics of the product/process.

“Among the remediation techniques proposed by the International Tanker Owners Pollution Federation (ITOPF), 6 techniques were applied during the experiments (Fig. 1) (ITOPF, 2011). In particular, considering the applicable physical remediation techniques in a gravel and/or rocky shore from the manual of ITOPF (2011), we chose the techniques which can be used in an indoor scale experiment (Table S2) possibly. They included 3 physical techniques; manual hand wiping (MA), flushing (FL), and hot water-high pressure (HW/HP). We analyzed the pressure in each remediation technique with (MA: 30 bars, FL: 20 bars, and HW/HP: 130 bars) by the in-line pressure gauge kit in each machine. Total 4 products were used in the biological remediation (fertilizer: oleophilic fertilizer, S200; emulsifier: Tween 80; multi-enzyme: Oil Spill Eater II; microbe: mixture (*Alcanivorax* sp., *Roseovarius* sp., *Corynebacterium variabilis*, *Dietzia* sp., *Sphingomonas yanoikuyae*, *Kyotococcus sedentarius*, *Bacillus aquimaris*, *Novosphingobium*, *Pentamotivorans*, and *Yarrowia lipolytica*)). To evaluate the mixed effects of biological remediation, 3 combined biological techniques; fertilizer + emulsifier (FE), fertilizer + emulsifier + microbe (FEM), and fertilizer + multi-enzyme + microbe (FMeM) were selected. In

addition, natural attenuation during which no active treatments were applied (NT) was used to simulate responses to seawater circulation alone.”

Toxicity of the oil was measured as well as the reduction in toxicity or increase in toxicity was measured once the product/process was incorporated. Bacteria counts and Benthic recovery were measured as well, to look for short term and long term impacts of utilizing a particular product/process. Each variable measured was given a score, and the scores were tallied up to discern the most effect reduction in oil with the least effect on the environment/marine species, as well as the time for the oil contaminated area to recover after the use of a product/process.

“Biological remediation, which was applied for 30 d, during which weathered oil was present on gravel (set treatment day as 0 d). Rate of removal of TPH was 49%, greater than NT when biological remediation techniques were applied. Removal of TPH of 50–66% was observed after 90 d (– 30 d to 60 d) (Fig. 2b and S3b). Greatest reduction of toxicity of 62%, was observed for treatment FMeM, “This means that Oil Spill Eater II (OSE II) produced the greatest reduction of oil, compared to fertilizers, S200 and Tween 80.

The “recovery of the benthic invertebrate community was greater with increases of all three ecolog- ical endpoints observed during the weathering period (Fig. S4b). On 60 d, the greatest ecological recovery of 346%, was observed for treatment FMeM followed by FEM and FE with improvements of 267% and 220%, respectively.” This means that OSE II by a significant percentage out performed the fertilizers, and other products.

“The number of bacterial OTUs in biological treatments also increased over 90 d of experiments, with final values being five-fold greater than initially stage (– 30 d) (Fig. S4b). Oil-degrading bacteria were more abundant in biological treatments than physical treatments, (Table 1). In marine environments exposed to oil spills, abundances of hydrocarbon- degrading bacteria rapidly expands (Love et al., 2021). Relatively lesser and slow breakdown of residual oils in biological treatments than physical treatments minimize this response.” This means the physical removals had a elevated adverse effect to the bacteria growth count , over the bioremediation products.

“The 90 d, total recovery efficiency reached 47% in the FMeM treatment, which was greatest among the biological treatments. In the previous study, as in one of the series of this study, a combination of microbes was effective for remediation of the sedimentary contamina- tion by oil. Interestingly, “no treatment” showed comparable recovery to others, indicating natural attenuation can promote soft bottom benthic community health.” This means that no treatment was as effective as Tween 80 and S200 and fertilizers, while OSE II was the most effective product with the efficiency of 47% obtained.

“Based on the MAUT analysis, FMeM treatment scored greater in all categories compared to other biological techniques (Fig. 5a and Table 1). Other techniques scored similarly in environmental perfor- mance and technical applicability (0.18–

0.27), but FMeM scored the greatest in environmental performance (0.45) because of a quick reduction of oil." Oil Spill Eater II was the best product utilized in this mesocosm study, with quick reduction of oil, while reducing the toxicity in the environment, and allowing for the quick recovery of the Benthic layer.

OSE II was then compared to physical removal, where OSE II proved to be the best means to reduce oil and protect the environment. The physical removal showed it could remove oil, however there were environmental adversarial reactions to this physical removal.

"According to the results of this study, the use of the initial implementation of MA and the use of FMeM (OSE II) treatment can promote the recovery of benthic community health avoiding further adverse effects."

The OSEI Corporation had associates present at the Valdez Oil Spill in Alaska and the Hebie Spirit oil spill in South Korea, these two spills were named in the early part of this report, and OSE II was actually used on both spills with great success. See OSE II at the Hebie Spirit oil spill <https://www.osei.us/photoalbums/south-korea-muyon-port-beach>, and <https://www.osei.us/photoalbums/south-korea-hebie-spirit-2> and this link to OSE II being used by the Homer Volunteer group in Homer Alaska during the Valdez spill [https://www.osei.us/tech-library-pdfs/2011/28-OSEI%20Manual SuccessStories.pdf](https://www.osei.us/tech-library-pdfs/2011/28-OSEI%20Manual%20SuccessStories.pdf) pages 178-179.

The Valdez spill Exxon attempted hot water high pressure washing, while the tide was going out, the problem was once the tide re-entered the shoreline the oil recoated the rocks, this was a very incomplete actual removal of the oil in the field, and basically accomplished nothing.

The use of hand wiping was carried out during the Valdez spill as well with rags , this while maybe producing a moderate removal rate came with a high cost to the personnel. Due to the VOC's associated with crude oil spills, as well as toxic chemicals applied to the spill, CNN reported during the BP Macondo spill, that over 99% of the Valdez responders had died within 10 years, keep in mind the average responder was 30 years old or less. This also brings up a peripheral aspect to using volunteers to pick up oil/tar balls off of beaches, this should never be allowed, since these unsuspecting personnel are breathing VOC's and other toxic aspects of oil spills, especially when OSE II is accessible globally and is currently used 120 countries as of September 2023. This report shows what numerous other University and Government studies/experiments have shown previously, that is OSE II is the most effective means to safely remove oils spills while protecting natural resources, and reducing the toxicity of the oil to the environment.

The great efficiency this report shows for OSE II was in a laboratory setting, while the mesocosms were some of the best experimental design we have seen, it is still different than the field. OSE II has been used on over 64,000 spills at the time of this summary writing, and OSE II has been used on numerous open water and shoreline spills. OSE II was used on over a 550,000 liter spill in Nigeria Bayless state, where oil covered 18 kilometers of shore line, where about half the shoreline was covered

with mangroves, the rest was sand based, with a substantial amount of oil on the open water. OSE II was applied while fishing was suspended, to the shoreline, mangroves, and open water. Shoreline surface samples were obtained as well as half meter deep samples were taken and tested over time. The oil had been reduced by 97.9% on the shoreline and 99.9% on the open water while protecting the natural resources, and because OSE II causes oil to float, none of the marine species were destroyed, or effected by the spill, since the oil never entered the water column. No humans suffered ill health as well, this actual field use as well as numerous other shoreline and open water clean ups show while OSE II is very effective in the laboratory, it is even more effective in the field. This is the video and the report links for the massive clean up: video <https://www.osei.us/archives/1519> report link <https://www.osei.us/wp-content/uploads/OSEI-Nigeria-AGIP-Brass-Terminal-Clean-up-complete-data-set-4-14-14-.pdf> There has never been another product or process in the world clean up this massive of an oil spill, as economical, as non toxic and as safe, nor as efficient as OSE II performed.

OSE II can stand alone as a first response and only response tool and has for 33 years to date. This report just substantiates OSE II ability further. Report, and link below.

Steven Pedigo

CEO OSEI Corporation

This is the link to the report

<https://www.sciencedirect.com/science/article/pii/S0304389422007348>



Best available technique for the recovery of marine benthic communities in a gravel shore after the oil spill: A mesocosm-based sediment triad assessment

Taewoo Kim^{a,1}, Changkeun Lee^{a,1}, Junghyun Lee^a, Hanna Bae^b, Junsung Noh^c, Seongjin Hong^d, Bong-Oh Kwon^e, Jae-Jin Kim^f, Un Hyuk Yim^g, Gap Soo Chang^h, John P. Giesy^{i,j}, Jong Seong Khim^{a,*}

^a School of Earth and Environmental Sciences & Research Institute of Oceanography, Seoul National University, Seoul 08826, Republic of Korea

^b GeoSystem Research Corporation, Gunpo 15807, Republic of Korea

^c Department of Environment and Energy, Sejong University, Seoul 05006, Republic of Korea

^d Department of Ocean Environmental Sciences, Chungnam National University, Daejeon 34134, Republic of Korea

^e Department of Marine Biotechnology, Kunsan National University, Kunsan 54150, Republic of Korea

^f Division of Environmental Science & Ecological Engineering, College of Life Science & Biotechnology, Korea University, Seoul 02841, Republic of Korea

^g Oil and POPs Research Group, Korea Institute of Ocean Science and Technology, Geoje 53201, Republic of Korea

^h Department of Physics and Engineering Physics, University of Saskatchewan, Saskatoon, SK S7N5E2, Canada

ⁱ Department of Veterinary Biomedical Sciences & Toxicology Centre, University of Saskatchewan, Saskatoon, SK S7N5B3, Canada

^j Environmental Sciences Department, Baylor University, Waco, TX 76798-7266, United States

HIGHLIGHTS

- Mesocosm study first adopting SQT revealed varied oil cleanup efficiencies.
- Physical cleanup effectively removed oil, but initially harmed benthic community.
- Mixed biological methods increased oil removal efficacy across SQT components.
- No treatment[†] recovered benthic community considerably, highlighting natural attenuation.
- Physical hand wiping combined with bioremediation showed the greatest oil recovery.

GRAPHICAL ABSTRACT



ARTICLE INFO

Keywords:

Physical cleanup
Biological recovery
Benthic community response
Ecological restoration
Natural attenuation

ABSTRACT

Ecotoxicological effects of spilled oils are well documented, but study of recovery of marine benthic communities is limited. Long-term recovery of hard bottom communities during physical and biological remediations after a spill was monitored. A 60-day experiment was conducted using a mesocosm with monitoring of eight endpoints by use of the sediment quality triad (SQT). First, physical treatment of hot water + high pressure flushing maximally removed residual oils (max=93%), showing the greatest recovery among SQT variables (mean=72%). Physical cleanup generally involved adverse effects such as depression of the microphytobenthic community

* Corresponding author.

E-mail address: jskhim@snu.ac.kr (J.S. Khim).

[†] These authors contributed equally to this work.

<https://doi.org/10.1016/j.jhazmat.2022.128945>

Received 10 March 2022; Received in revised form 10 April 2022; Accepted 14 April 2022

Available online 21 April 2022

0304-3894/© 2022 The Author(s). Published by Elsevier B.V. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>).

during the initial period. Next, biological treatments, such as fertilizer, emulsifier, enzyme and augmentation of the microbes, all facilitated removal of oil (max=66%) enhancing ecological recovery. Analysis of the microbiome confirmed that oil-degrading bacteria, such as *Dietzia* sp. and *Roseovarius* sp. were present. A mixed bioremediation, including fertilizer + multi-enzyme + microbes (FMeM) maximized efficacy of remediation as indicated by SQT parameters (mean=47%). Natural attenuation with "no treatment" showed comparable recovery to other remediations. Considering economic availability, environmental performance, and technical applicability, of currently available techniques, combined treatments of physical removal via hand wiping followed by FMeM could be most effective for recovery of the rocky shore benthic community.

1. Introduction

Oil spills can result in a wide range of adverse ecotoxicological effects on marine ecosystems, across diverse habitats of tidal flats, sandy beaches, and gravel shore (EPA, 1993; ITOPF, 2011). Spilled oils could reach and easily penetrate nearshore bottoms, varied though depending on the sedimentary environments such as mud content, sediment particle size, or organic and oxygen content. Permeation of oil into substrata could subsequently result in persistent, residual oil in surface and/or subsurface layers (Moore, 2016). Remaining, deeper subsurface oils can affect abundances and diversity of marine organisms (Hayes et al., 2010; Nixon et al., 2018; Yim et al., 2020). For example, after the *Hebei Spirit* spill in South Korea and the *Exxon Valdez* spill in Alaska, it took over 6 and 20 years, respectively, for benthic communities to recover and return to pre-spill status (Dave and Ghaly, 2011; Li et al., 2016).

Various techniques for remediation have been developed and employed to cleanup spilled oil (Azubuike et al., 2016; Dhaka et al., 2021). On hard bottoms, physical cleanups, such as hand wiping and hot water/high pressure flushing are essential for initial removal of stranded oils (ITOPF, 2011). Some biological treatments, which generally include applications of fertilizers (Nikolopoulou et al., 2007), emulsifier (Feng et al., 2006), multi-enzyme (Das et al., 2011) or augmenting microbial communities (Gao et al., 2011) are useful for longer-term cleanups. Typically, the primary focus on these methods of cleanup are rapid removals of spilled oils, but not considering receptor-oriented recovery of populations or communities (Siva et al., 1979). Historically, less attention has been paid to recovery of benthic organisms. For example, hot water/high pressure flushing, used in response to the *Exxon Valdez* spill, effectively removed stranded oils on hard surfaces, but severely damaged epibenthos (Mearns et al., 1993). Following the *Torrey Canyon* spill, use of dispersants caused unintended, greater toxicities to many organisms (Wardrop, 1991). Thus, a choice of timely method selection would be of great significance in effective cleanup implementation as oil spill response.

An intertidal zone with hard bottoms typically has great biodiversity, and its characteristics, including varying slopes, overhangs, and various textures of surfaces where various marine organisms can live. Spilled oil can penetrate into hard bottoms as a function of porosity related to gravel type and size. Finally, oil that penetrates gravel can form a relatively permanent surface or subsurface layer (Moore, 2016). Selection of the most appropriate techniques for remediation of hard bottom communities is challenging. For example, variations in oceanographic conditions, such as tide, current, geomorphology, sediment facies all influence spatiotemporal distributions and fates of sedimentary residual oils. Accessibility to the impacted shoreline, in particular, must be considered. On the shore, oil frequently coats hard surfaces such as rocks and gravel during the tidal range, accumulating in rock pools and cracks. Typically, the oil does not remain static, but is moved along the coast, eventually stranding in a safe spot. Access to the shorelines can be challenging at times, and special attention must be paid to worker safety in slippery areas, as well as to the hazards of waves and tides. In particular, the low load bearing qualities of such shorelines impede both vehicle and personnel transportation. That is the reason why relatively mobile techniques and equipment would be used to remove oil (ITOPF,

2011).

Since responses of benthic communities are important to overall recovery of marine ecosystems, remediation methods should be carefully chosen considering a number of factors. Thus, application of SQT assessment adopting lines of evidence approach, can be used to select the best available technique (BAT) for the remediation of sedimentary contamination by spilled oils. SQT is composed of three key components: chemical exposure (chemistry line of evidence (LOE)), toxicological effect (toxicology LOE), and benthic community health (ecology LOE) (Chapman, 1990, 1996). A single strategy or method cannot provide strong evidence for sediment toxicity, as causation cannot be established without integrating the three components. Nowadays, the ecological LOE contains a diverse array of benthic community, including microbiota and meiofauna (Khim et al., 2018, 2022). From a chemical perspective, total petroleum hydrocarbon (TPH) and unresolved complex mixture (UCM) could be targeted (Yim et al., 2012). Second, toxicity tests sensitive to polycyclic aromatic hydrocarbons (PAHs) and weathered PAHs should be conducted; The H4IIE-*luc* bioassay (Martínez-Gómez et al., 2010), microtox® and fish embryo test (Lee et al., 2018a) have also been shown to be useful. Finally, ecological endpoints for multiple taxonomic groups relating to the benthic communities, such as diversity of the microbiome (Bourlat et al., 2013), microphytobenthos (MPB), and macrofauna can be monitored to determine potential ecological risks from oil spills (Lee et al., 2019a; Mohr et al., 2005). Overall, the integrated SQT approach is useful to accurately assess overall recovery of benthic communities in the vicinity of spills.

Enclosed experimental ecosystems, such as indoor mesocosms provide useful tools for examining effectiveness of cleanup and remediation. A recent mesocosm study successfully demonstrated the most appropriate biological methods for remediation of oil from soft bottoms and recoveries of marine benthic communities (Lee et al., 2019a). Here, as a continuing, but more in-depth effort, we evaluated physical and biological remediations, targeting recoveries of hard-bottom communities. The study adopted the advanced SQT approach, with multiple measures of chemical, toxicological, and ecological indicators across eight endpoints: (1) TPH, (2) UCM, (3) fish embryo mortality, (4) bacterial inhibition, (5) aryl hydrocarbon receptor (AhR) mediated potency, (6) MPB cell, (7) bacterial operational taxonomic unit (OTU), and (8) benthic primary production. Finally, the BAT for remediation of oil spills was carefully determined and discussed considering all eight indexes of the SQTs.

2. Materials and methods


2.1. Sample preparation

To simulate the gravel-covered coastal zone affected by oil spills, gravel with a diameter of 6.5 cm or less was collected from Gimhae on the southern coast of South Korea. We focused on the contamination of the gravels from oil exposure; therefore, the media used in the experiment were only composed of gravel. Collected gravel was introduced to seawater for 30 days in order to recruit marine organisms before initiating experiments (Fig. 1). Gravel was exposed to Iranian Heavy Crude oil (details in Table S1 of the Supplementary materials) at a volume ratio of 1:10 (oil: gravel) and was homogenized with a

tank with $200 \times 70 \times 80$ cm in dimension and ~ 100 L of capacity at the bottom. Temperature was maintained constant ($18\text{--}19^\circ\text{C}$) by use of the temperature control system. The volume of gravel in the aquarium portion of the mesocosm was identical to that of the gravel shore near where the mesocosm was installed. Natural seawater was supplied to experimental aquariums at 40 L for 12 h so that the gravel pile could be gradually submerged from the lower layer to the upper layer. This daily of horizontal supply and discharge of seawater at a 12 h interval, mimicking an in situ tidal condition, was repeated during the experimental period of 60 days without high-energy tidal action. The irradiance reaching the gravels was measured to be approximately $380\text{--}425 \mu\text{mol m}^{-2} \text{s}^{-1}$ from each aquarium's LED lamps (20 watts per lamp or aquarium).

Among the remediation techniques proposed by the International Tanker Owners Pollution Federation (ITOPF), 6 techniques were applied during the experiments (Fig. 1) (ITOPF, 2011). In particular, considering the applicable physical remediation techniques in a gravel and/or rocky shore from the manual of ITOPF (2011), we chose the techniques which

The artificial tide system was designed to simulate tides on gravel-covered shores (Fig. S1). The tide control system was composed of three compartments: (1) one water storage tank with a dimension of $200 \times 90 \times 41$ cm ($W \times L \times H$) and a capacity of ~ 700 L on the top (for thermal and dissolved oxygen control); (2) a set of 10 experimental aquariums with $45 \times 35 \times 40$ cm per aquarium in the middle (to control water level, tidal cycle, and light condition); and (3) one wastewater



can be used in an indoor scale experiment (Table S2) possibly. They included 3 physical techniques; manual hand wiping (MA), flushing (FL), and hot water-high pressure (HW/HP). We analyzed the pressure in each remediation technique with (MA: 30 bars, FL: 20 bars, and HW/HP: 130 bars) by the in-line pressure gauge kit in each machine. Total 4 products were used in the biological remediation (fertilizer: oleophilic fertilizer, S200; emulsifier: Tween 80; multi-enzyme: Oil Spill Eater II; microbe: mixture (*Alcanivorax* sp., *Roseovarius* sp., *Corynebacterium variabilis*, *Dietszia* sp., *Sphingomonas yanoikuyae*, *Kyococcus sedentarius*, *Bacillus aquimaris*, *Novosphingobium*, *Pentamatorovans*, and *Yarrowia lipolytica*)). To evaluate the mixed effects of biological remediation, 3 combined biological techniques; fertilizer + emulsifier (FE), fertilizer + emulsifier + microbe (FEM), and fertilizer + multi-enzyme + microbe (FMeM) were selected. In addition, natural attenuation during which no active treatments were applied (NT) was used to simulate responses to seawater circulation alone.

All treatments were applied at times equivalent to low tide, according to the tidal cycle in the area (34° 59.578'N, 128° 40.393'E) where the mesocosm was installed. Physical treatments were employed initially (0 d) and biological treatments were applied at the first low tide time on days 0, 15, 30, 45, and 60 (Table S3). Advantages and disadvantages of selected techniques are listed in Table S4.

2.3. Chemical assessments

2.3.1. Instrumental analysis of residual TPH and UCM in gravel

The analytical procedures for TPH and UCM in gravel followed methods used in previous studies (Yim et al., 2005; Yim et al., 2011). In brief, 120–140 g oil-contaminated gravel was mixed with anhydrous sodium sulfate (Sigma-Aldrich, St. Louis, MO) to remove water, and surrogate standard (o-terphenyl) was added. The samples were ultrasonically extracted for 15 min with 150 mL dichloromethane (Burdick & Jackson, Muskegon, MI), with three repeats. The extracts were concentrated to 1 mL under a gentle stream of nitrogen gas, and the internal standard (5 α -androstane) was added. TPH and UCM were calculated by using an Agilent 7890 gas chromatograph equipped with a flame-ionization detector (Agilent Technologies, Santa Clara, CA) (Wang et al., 1994).

2.4. Toxicological assessment

2.4.1. Zebrafish (*Danio rerio*) embryo test

In order to clarify efficiencies of each remediation, bioassays were conducted at three times, including an initial oil exposure (–30 d), first application of each remediation (0 d), and final stages (60 d). Oil-contaminated gravel was extracted by DCM, and the extracts were substituted with dimethyl sulfoxide (~10 mg oil-contaminated gravel equivalent (GEq) mL⁻¹). Before the solution was exposed to embryos, embryos with no abnormality in differentiation were selected. Using 12-well plates, the experiment was performed on 12 individuals with three repetitions. Individuals were exposed for 96 h in a culture system that was maintained at a constant temperature (26 °C). Every day, the mortality of each individual and developmental effect rates (spinal curvature and cardiac edema) were checked with a microscope (Lee et al., 2018a).

2.4.2. *Vibrio fischeri* (*V. fischeri*) bioassay

The *V. fischeri* bioassay was used to evaluate the potential toxicity of residual oil in gravel. Organic extracts from gravel were exposed to *V. fischeri*, confirming the effect of residual oil on the inhibition of luminescence using N-TOX (model 200; NeoEnBiz Inc., Bucheon, Korea), which is a commercial toxicity assessment kit (~10 mg GEq mL⁻¹). The *V. fischeri* bioassay was conducted following the standard method specified by the Ministry of Maritime Affairs and Fisheries of South Korea (Lee et al., 2019b, 2019c).

2.4.3. H4IIE-luciferase transactivation bioassay

The H4IIE-luc bioassay was performed to detect AhR-mediated potencies in oil-contaminated gravel according to previously published methods (Hong et al., 2012). In brief, trypsinized cells (~7.0 × 10⁴ cells mL⁻¹) were seeded in 96-well plates and incubated for 72 h. The plates were then dosed with the appropriate standards (2,3,7,8-tetrachlorodibenzodioxin; 0.1% dose), samples (raw; 0.1% dose (~0.1 mg GEq mL⁻¹)), and solvent controls (0.1% dimethylsulfoxide) for 72 h. After 72 h exposure, the results were expressed as relative luminescence units that were quantified using a Victor X3 multi-label plate reader (PerkinElmer, Waltham, MA).

2.5. Ecological assessment

Considering that organisms have different response rates to temporal variation of oil contamination, each data point is given as a different color, according to the endpoints (Yim et al., 2017). Because the lower the trophic levels respond more rapidly and responses to sedimentary contamination are complex, data points were assigned in this study in the following order: bacteria (n = 5) > MPB cells (n = 3), and meiofauna (n = 3). Because estimates of primary production were derived from the results of functions in various benthic organisms, we collected more data points than for other biological variables.

2.5.1. Identification of MPB and cell counting

Oil-contaminated gravel was collected in triplicate from each experimental aquarium. For diatom separation from gravel, 5% formalin solution was added to the collected gravels (5 of about 100 pieces of gravel in each aquarium) and thoroughly shaken. Only the supernatant was decanted into a beaker. After adding 10 mL distilled water to the remaining gravel, the water-gravel mixture was sonicated for 5 seconds. The supernatant was removed from the submerged samples, and 30 mL distilled water and 10 mL hydrochloric acid were added for the acid treatment. Samples, containing MPB cells, were heated and cooled to be neutralized for species identification and cell counting (until counting max of 100 cells) (Bae et al., 2020).

2.5.2. Bacterial meta-genomic analysis

The bacterial community was analyzed by extracting total genomic DNA from gravel, using a PowerSoil® DNA Isolation Kit (MoBio Laboratories, Solana Beach, CA). Sequencing was conducted using the Illumina MiSeq Platform with 16 S rRNA gene amplicons. The amplicons of V34 were prepared using the forward primer (16 S 341F: TCG TCG GCA GCG TCA GAT GTG TAT AAG AGA CAG CCT ACG GGN GGC WGC AG) and the reverse primer (16 S 805R: GTC TCG TGG GCT CGG AGA TGT GTA TAA GAG ACA GGA CTA CHV GGG TAT CTA ATC C). Quantitative Insights into Microbial Ecology was used to analyze the sequence data. Using the UCLUST algorithm, sequences were clustered by OTUs at a 97% identity threshold (Edgar et al., 2010). Taxonomic information was delegated by aligning sequences with the data from Ribosomal Database Project (RDP) (Cole et al., 2014).

2.5.3. Measurements of benthic primary production

Primary production of benthic algae was measured in each experimental aquarium (three repetitions) using a Diving-PAM fluorometer (Walz, Effeltrich, Germany) (Perkins et al., 2001). The maximum relative electron transport rate (rETR_m) was determined as the product of F_q' / F_m' and irradiance (Sakshaug et al., 1997). F_q' and F_m' denote the proportion of harvested photons driving photosynthesis and the light-adapted maximum fluorescence, respectively.

2.6. Multi-attribute utility theory (MAUT) analysis for selection of the best available technique for remediation of oil

MAUT analysis is a decision-making approach in multi-criteria decision analysis (MCDA). Various data were used as nine assessment

factors (main 3 criteria: economic availability (Ea), environmental performance (Ep), and technical applicability (Ta)) within MAUT analysis. Each criterion was scaled from 0 (worst) to 1 (best) based on the average result. The best available remediation assessment was determined by use of MAUT, which was based on three previously proposed criteria (Dave and Ghaly, 2011; Zheng et al., 2019): Ea in terms of cost (relative inexpensive); Ep in terms of efficiency, effect on oil (physical and chemical change of properties), potential toxicity, recovery of benthic community, and further treatment (no further treatment required); Ta in terms of time (removal of oil within days), weather (favorable for application of method), reliability (the method works the majority of the time), and level of difficulty (easy to maintain and operate) (Fig. S2). Each criterion was weighted (15% for economic availability, 50% for environmental performance, and 35% for technical applicability).

2.7. Statistical analysis


Data analyses were carried out using IBM SPSS software (version 23.0; SPSS Inc., Chicago, IL). The difference of recovery and reduction rate among each treatment was analyzed by analysis of covariance (ANCOVA). In all statistical analyses, p values less than 0.05 were considered to be statistically significant. Principal component analysis (PCA) to visualize the similarity between selected endpoint (concentrations of TPH and UCM, HI, and primary production) and bacterial abundance.

3. Results and discussion

3.1. Physical and biological remediations

Each efficiency was determined to increase (ecology) and/or



Physical remediation

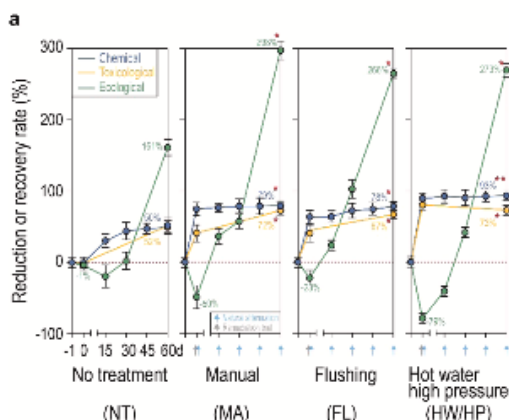

Chemical reduction: average reduction rate of TPH and UCM concentrations; toxicological remediation: average reduction rate of AhR-mediated potency, luminescence inhibition, and embryo mortality; ecological recovery rate: average increase rate of MPB cell, bacterial OTU, and max. rETRm

Two-way ANCOVA analysis was conducted showing significant level for each approach between remediation techniques and no treatment $p < 0.05$ * $p < 0.01$

Biological remediation

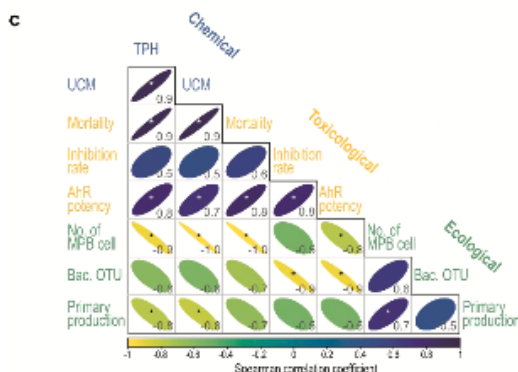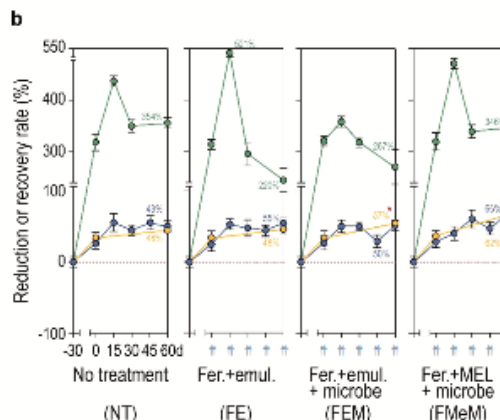

Spearman's correlation matrix was conducted showing the coefficient value and significant level * $p < 0.05$

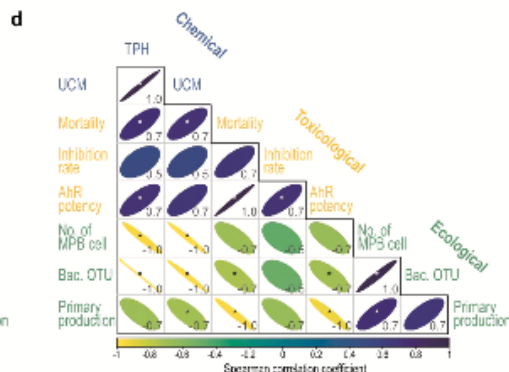


Fig. 2. a–b: Chemical and toxicological reduction rate and ecological recovery rate after implementation of each remediation technique (physical and biological remediation). c–d: Spearman's correlation matrix was conducted showing the coefficient value and significant level. A color-coded correlation scale is provided on the downward of each plot.

reduction rate (chemical and toxicity) as compared to the initial stage in order to evaluate the effect of using remediation techniques (Fig. 2). Physical remediation after exposure of oils to gravels resulted in time-dependent, recovery of all three components of the SQT, but efficiencies of recovery varied among the eight endpoints. Removal of hydrocarbons of 78–93% occurred within 60 days (Fig. 2a and S3a). After 60 d, rates of reduction of hydrocarbons of several treatments were significantly different from that of NT (MA: $p < 0.05$, FL: $p < 0.05$, and HW/HP: $p < 0.01$). Physical remediation seemed to mitigate toxicity of residual oil with an average reduction rate of 71% (MA: 72%; FL: 67%; and HW/HP: 73%) compared to the initial stage (–1 d), which was significantly greater than that of NT (52% and $p < 0.05$) (Fig. 2a). Adverse effects on measures of ecosystem structure were observed soon after applications of physical remediation. In particular, the HW/HP treatment caused the greatest negative effects on ecological endpoints (mean = –79%) on the –1 d (Fig. S4a). However, the rate of recovery of structure of the benthic community increased as the seawater exchange promoted recruitment of micro-benthic organisms. Treatment MA resulted in the greatest (298%) recovery of the benthic community, followed by HW/HP (273%) and FL (266%) at the end of experiment (60 d), which almost doubled compared to that of NT (161%) (MA: $p < 0.05$, FL: $p < 0.05$, and HW/HP: $p < 0.05$).

Biological remediation, which was applied for 30 d, during which weathered oil was present on gravel (set treatment day as 0 d). Rate of removal of TPH was 49%, greater than NT when biological remediation techniques were applied. Removal of TPH of 50–66% was observed after 90 d (–30 d to 60 d) (Fig. 2b and S3b). Greatest reduction of toxicity of 62%, was observed for treatment FMeM, followed by FEM and FE, with reductions of 57% and 48%, respectively. Recovery of the benthic invertebrate community was greater with increases of all three ecological endpoints observed during the weathering period (Fig. S4b). On 60 d, the greatest ecological recovery of 346%, was observed for treatment FMeM followed by FEM and FE with improvements of 267% and 220%, respectively.

Reduction of residual oil was proportional to physical pressure given to each treatment. For example, reduction was greatest for treatment HW/HP (130 bars), followed by MA (30 bars), FL (20 bars), and NT (Table S5). Of the biological remediation treatments, TPH and UCM were reduced to the least concentrations by treatment FMeM, which indicated that combined use of fertilizers and augmenting the microbial community was effective at breaking down residual oil. However, compared to physical techniques, biological techniques resulted in more gradual reduction in TPH and UCM. This could be due to fertilizer, MEL, and microbe solutions stimulate growth of existing bacteria that were capable of degrading petroleum, which results in time-lagged promoting the natural degradation (Kim et al., 2005).

Reduction in toxicity, including mortality of embryos and AhR-mediated potency in gravel, was observed with the reduction of TPH after physical treatments (Fig. 2c, Tables S6, and S7) ($p < 0.05$). Embryo stages of development in fish have been found to be sensitive to exposure to oil, which especially includes various dioxin-like compounds, causing AhR activity (Johann et al., 2020). The *V. fischeri* bioassay is less sensitive to reduction of residual oil during the 90 days of experiment. For example, inhibition of luminescence relatively small responses (<50%), compared to fish embryo mortality (~100%), even when the concentration of TPH and UCM were greatest during the initial period. Results of previous studies have found that toxicity of oil to bacteria depends on constituents of the mixture other TPH or UCM (Brils et al., 2002; Adams, 2015). Toxic potency of residual oils decreased over 90 days (Fig. 2d, $p < 0.05$) when biological treatments were applied. For treatment FE, AhR-mediated potency did not decrease from 0 d to 60 d, even though TPH decreased (Tables S5 and S6). This is in accordance with the results reported by Johann et al. suggesting that emulsifier contributes to greater toxicity compared to native oils (Johann et al., 2020). Indeed the emulsifier does not appear to effectively remove the dioxin-like compounds affecting the AhR activity at the moment (Bach et al., 2005).

Ecological endpoints of SQT, initially included four targets, including MPB, bacteria, meiofauna, and primary production, generally encompassing key benthic taxonomic groups. Due to small numbers of individuals detected in control treatment (Fig. S5), meiofauna were not utilized to calculate rates or efficiencies of recovery. For physical treatments, MPB cells decreased within a day of removal of oil, although chemical concentrations of TPH and UCM decreased dramatically (Fig. S4a, S6a, and Table S8). This could be simply due to physical disturbance along with removal of oil from surfaces of gravel. MPB cells increased after 60 d during experiments, which confirms recolonization by MPB cells following proliferation after exposure to oil was less. This phenomenon was observed for all of physical treatments, but HW/HP showed relatively good recovery of MPB. Similar to physical treatment, the MPB cells after 0 d and/or 60 d in biological treatments showed significantly greater numbers of MPB cells compared to the initial exposure to oil (–30 d) (Fig. S4b). Application of emulsifiers was an effective at reducing residual oil, but adversely affected the MPB community (Fig. 2d, $p < 0.05$). For example, treatments FE and FEM, which contained emulsifiers, resulted in lesser numbers of MPB cells at the end of biological treatments even though concentrations of TPH and UCM decreased during that period. Toxic constituents of the emulsifiers affected the MPB community which offset the beneficial effects of dispersing residual oil (Hook and Osborn, 2012). In general, MPB species observed at the end of physical and biological treatments were dominated by a few taxa, including *Navicula* sp., *Amphora* sp. and *Nitzschia* sp. (Fig. S6 and S7), genera that have been reported to be resistant to effects of oil (Patrick and Palavage, 1994).

Changes in the bacterial community were observed during physical and biological remediations, that resulted in greater numbers of bacterial OTUs more quickly. In particular, rapid increase of bacterial OTUs during NT indicated faster recovery under natural conditions (Fig. S4a). During treatment with HW/HP, recovery of bacterial OTUs after 60 d was not clearly observed, and was eventually less than that initially (factor change: <1). Indices of bacterial diversity for HW/HP were less than those for other treatments. For instance, the Chao1 index decreased over 90 d (Table 1). The lesser *HI* (n17C/pristane and n18C/phytane) observed for treatment HW/HP resulted in a decrease in biodegradation of oil by bacteria (De Vogelaere and Foster, 1994). Some previous studies reported that the HW/HP method could damage directly to the habitat in which the marine organism lives, both in the short- and long-term periods (Paine et al., 1996; Pezeshki et al., 2000).

The number of bacterial OTUs in biological treatments also increased over 90 d of experiments, with final values being five-fold greater than initially stage (–30 d) (Fig. S4b). Oil-degrading bacteria were more abundant in biological treatments than physical treatments, (Table 1). In marine environments exposed to oil spills, abundances of hydrocarbon-degrading bacteria rapidly expands (Love et al., 2021). Relatively lesser and slow breakdown of residual oils in biological treatments than physical treatments minimize this response (Fig. S8b).

Primary production in the benthic environment, monitored in the remediation experiments to assessed functioning of microorganisms under the oil exposed environments tended to increase during both physical and biological remediations. Benthic, primary production increased 2- to 6-fold in all treatments over 60 d and was significantly ($p < 0.05$) and negatively correlated with concentrations of TPH and UCM (Figs. 2c and 2d), increasing as the amount of oil decreased. However, 30 days of pre-seawater exchange before the actual biological treatments resulted in the greatest benthic primary production across all biological treatments. Greater primary production was attributed to recruitment of MPB and bacteria during continuous seawater inputs and consumption of hydrocarbon by oil-degrading bacteria (Valentine et al., 2015).

Table 1
Shannon and Simpson diversity index, and Chao1 index for each of the sampling in physical and biological remediation techniques.

Remediation techniques	Diversity and richness index of bacteria														
	Shannon					Simpson					Chao1				
	-1 d	0 d	15 d	30 d	60 d	-1 d	0 d	15 d	30 d	60 d	-1 d	0 d	15 d	30 d	60 d
Physical															
NT	5.5	5.5	5.5	5.7	6.2	0.9	0.9	0.9	1.0	1.0	132	132	469	524	592
MA	5.5	6.6	5.4	4.9	5.5	0.9	1.0	0.9	0.9	0.9	132	233	360	455	612
FL	5.5	6.7	4.7	5.9	5.3	0.9	1.0	0.9	0.9	0.9	132	203	352	418	620
HW/HP	5.5	4.2	4.4	5.7	5.2	0.9	0.9	1.0	0.9	0.9	132	255	200	198	94
Control	3.7	3.7	4.5	4.9	6.4	0.8	0.8	0.8	0.9	1.0	387	387	721	538	229
Biological															
NT	1.8	5.2	6.1	4.7	5.8	0.4	0.9	1.0	0.9	0.9	142	306	673	523	839
FE	1.8	5.2	6.1	5.1	5.8	0.4	0.9	1.0	0.9	1.0	142	306	519	600	699
FEM	1.8	5.2	4.6	5.3	5.8	0.4	0.9	0.9	0.9	1.0	142	306	471	601	791
FMeM	1.8	5.2	5.6	5.0	5.9	0.4	0.9	0.9	0.9	1.0	142	306	516	575	731
Control	8.0	8.0	7.5	4.6	7.7	1.0	1.0	1.0	0.7	1.0	1443	1443	1412	1173	1181

NT: no treatment; MA: manual; FL: flushing; HP: hot water & high pressure; FE: fertilizer + emulsifier; FEM: fertilizer + emulsifier + microbe; FMeM: fertilizer + MEL + microbe.

3.2. Dynamics in bacterial communities

Relative abundances of bacterial 16S rRNA gene sequences discriminatively revealed variation in relative compositions of bacterial communities. This information was used to address dynamics in structures of bacterial communities during exposure to and weathering of oil (Fig. S9). On average, three phyla (Proteobacteria, Bacteroidetes, and Firmicutes) accounted for more than 85% of bacterial communities during both physical and biological treatments (Fig. S10). For physical treatments, the principal component analysis (PCA) showed that abundances of bacterial phyla were interrelated with residual oil (TPH and UCM), *HI* (nC17/pristine and nC18/phytane), and primary production in the correlation matrix (Fig. S11). Results of PCA suggested that the two principal components collectively accounted for 58.8% of the total variance. Actinobacteria, Bacteroidetes, Cyanobacteria, Firmicutes, and Proteobacteria were grouped with the concentrations of the residual oil (represented by Groups I–III). Three classes of Proteobacteria were specifically grouped with respect to different endpoints. First, beta-proteobacteria was positively loaded with residual oil, while alpha-proteobacteria were grouped with *HI* and primary production, which indicated biodegradation and functional recovery. In comparison, gamma-proteobacteria did not load to any endpoints.

Temporal variation between the groups was observed and was a of concentrations of residual oil and hydrocarbons (aliphatic) for each physical remediation technique (Fig. 3a). Bacterial Group I included Bacteroidia, Bacilli, Clostridia, beta-proteobacteria, and others, including unknown classes from Actinobacteria and Cyanobacteria, and generally consisted of early oil-degrading bacteria which changed in response to aliphatic hydrocarbons in TPH (Fig. 3b). Group II included gamma-proteobacteria exclusively which have multiple oil-derived hydrocarbons, both aliphatic and aromatic, degrading metabolic activities; genera included *Pseudomonas*, *Alcanivorax*, *Thalassolituus*, and *Cycloclasticus*. For HW/HP treatment, relatively small abundance of bacteria associated with degradation of oil was detected because a large amount of oil was initially removed. In particular, the FL treatment seemed to promote the rapid removal of residual oil as well as natural degradation by bacteria when *HI* increased.

Samples dominated by Group III had greater *HI* and primary production later in the experiment period. The results showed that a greater availability of residual aromatics supported greater degradation of hydrocarbons and increased primary production by *Sulfitobacter* and *Erythrobacter* as phototrophic bacteria despite the effect of overall reduction in the amount of hydrocarbons. Results of previous studies have shown changes in bacterial communities during degradation of oil might be attributed to a preferences by various bacteria for hydrocarbon degradation intermediates as sources of carbon (Lea-Smith et al., 2015;

Uribe-Flores et al., 2019). Changes in structures of bacterial communities would be dependent on compositions of hydrocarbons present in oil during process of degradation of oil, in the order of alkanes, cycloalkanes, aromatics, resins, and finally asphalt (Dubinsky et al., 2013).


Changes in bacterial communities also occurred in response to lessening concentrations of hydrocarbons with increasing *HI* and primary production during biological treatments. Results of PCA ordination showed that the two principal components collectively accounted for 81.5% of total variance (Fig. S11b). Changes in structures of bacterial communities were strongly associated with experimental periods. Bacteria in Group I, which mainly degrade aliphatic compounds decreased in response to a gradual decrease in TPH (Fig. 3c). After 30 d of pre-exposure (–30 d to 0 d), the relative abundance of Group II noticeably increased. *Alcanivorax*, *Salegendibacter*, *Muricauda*, and *Marinicella* in gamma-proteobacteria were the prominent degraders of hydrocarbons (aliphatic and aromatic hydrocarbons) and more prevalent than any other taxa detected (Fig. 3d). Bacteria in Group III began to dominate the community after 30 d. In particular, these bacteria included *Roseovarius* and *Erythrobacter*, which are psychrophilic photosynthetic organisms in addition to *Dietzia*. Appearances of these bacteria is indicative of a community optimized for degradation of complex organic matter and they dominated the community in the treatments in which microbial communities were augmented and enhanced, either directly or with fertilization.

In contrast to physical treatments, biological treatments had relatively great amounts of residual oil, which resulted in the dominance of aliphatic compound-degrading bacteria in Group II (30 d to 60 d). Biological remediations influenced compositions and enriched bacterial populations with the ability to use dispersed compounds as the growth substrates (Kleindienst et al., 2015). Furthermore, these treatments enhanced abundances and expressions of oil-degrading bacteria, such as *Alcanivorax* and *Roseovarius* (Tremblay et al., 2017; Procópio et al., 2020). Together, biological treatments and proliferation of oil-degrading bacteria from seawater input collectively contributed to the overall reduction of residual oils in a combined manner.

3.3. Effectiveness of remediation techniques

To evaluate the effectiveness of various methods of physical and biological remediation, ratios of eight target endpoints to negative control values (clean gravel) were determined (Fig. 4 and S12). The results (–30, 0, 1, 30, and 60 d) were used to determine the recovery from the implementation of remediation treatments and oil weathering, and to confirm the long-term effects. The HW/HP treatment showed the greatest recovery effectiveness (72%), since the initial implementation for 60 d, followed by MA (68%), NT (54%), and FL (53%) (Fig. 4a).

Physical remediation

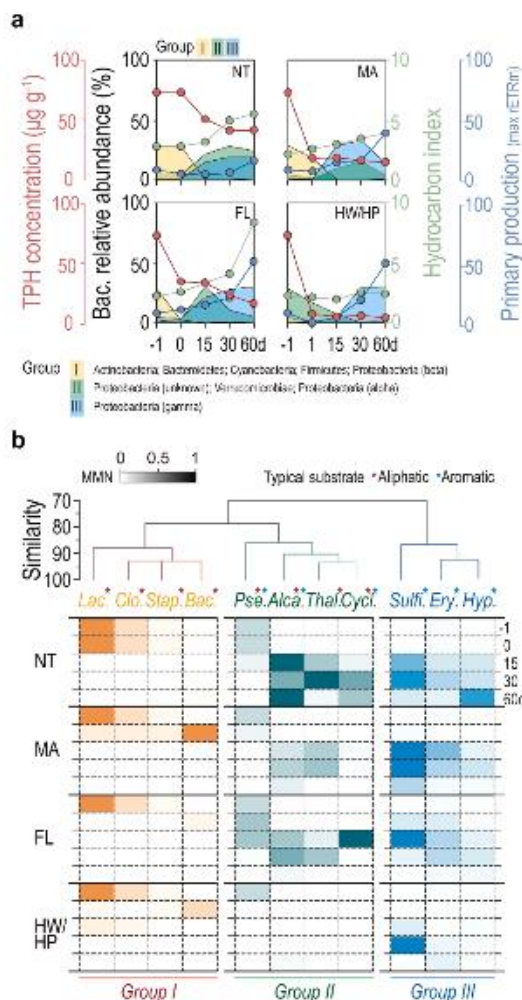

Biological remediation

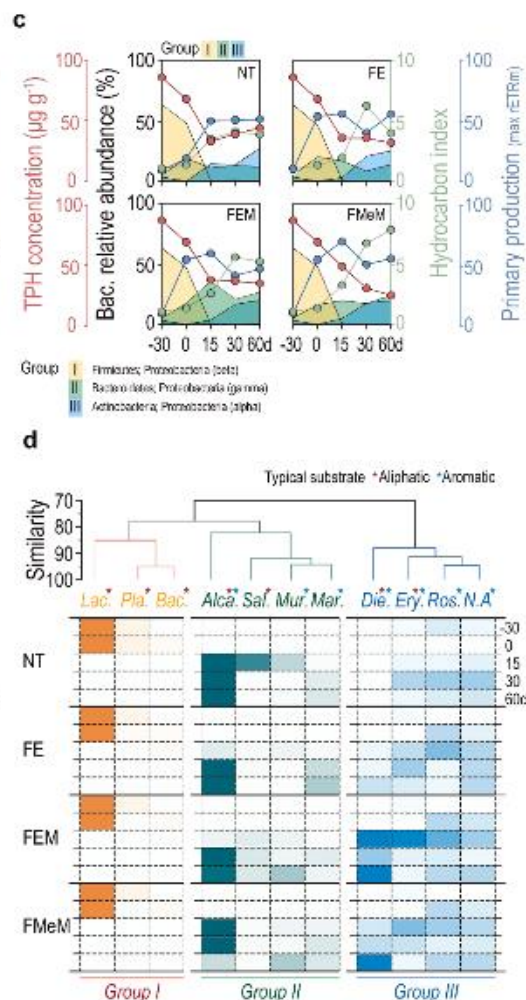


Fig. 3. Temporal variation of the most abundant bacteria in each treatment (a: physical remediation and b: biological remediation) and heat map showing changes to bacterial genera over the experiment periods (c: physical remediation and d: biological remediation). Genus name is provided for genera with over 3% of the relative abundance to the total for each remediation (Lac.: *Lactobacillus*; Clo.: *Clostridium*; Stap.: *Staphylococcus*; Bac.: *Bacillus*; Pse.: *Pseudomonas*; Alca.: *Alcanivorax*; Thal.: *Thalassolimus*; Cyl.: *Cycloclasticus*; Sulf.: *Sulfobacter*; Ery.: *Erythrobacter*; Hyp.: *Hyphomonas*; Pla.: *Planococcus*; Sal.: *Salicibacter*; Mur.: *Muricauda*; Mar.: *Marinicella*; Die.: *Dietsia*; Ros.: *Roseovarius*; and N.A.: unknown).

Except for MPB biomass and primary production, bacterial richness was adversely affected by HW/HP at 60 d (Fig. S12). After 60 d of all treatments, except for HW/HP, ecological endpoints first recovered rapidly, followed by toxicological endpoints. Although physical oil removal negatively influenced the marine life at the beginning of treatment, physical treatments accelerated the long-term recovery. In particular, ecological endpoints recovered by the MA treatment (100%) reached similar level to the control values. While the recovery of chemical endpoints were relatively great in the HW/HP treatment compared to other treatments, ecological endpoints showed little recovery. Furthermore, the HW/HP treatment had a lesser effectiveness

for toxicological endpoints on 60 d (55.3%) compared to 0 d (79.2%), indicating certain unknown effect. When HW/HP treatment was implemented to wash oil-contaminated gravel, the washed oil appeared to penetrate into the deeper layers of sediment and caused potential toxicity (Street, 2011; Walther III, 2014). Overall, although physical treatments were initially effective at removing oil, the oil could remain beneath the surface and cause further adverse effects on surrounding environments.

Weathering oil-contaminated gravel for 30 d before biological treatments given generally increased the recovery of chemical, toxicological, and ecological endpoints, with mean efficiency of > 30%

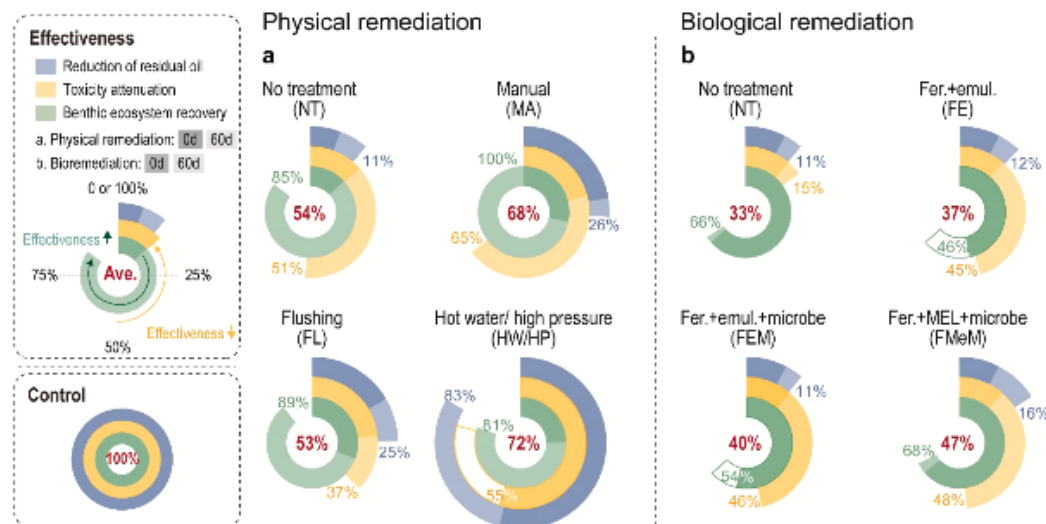


Fig. 4. Comparison of effectiveness based on integrated approaches with eight target elements. The integrated approaches included: 1) reduction of residual oil (TPH and UCM concentration), 2) toxicology attenuation (mortality, luminescence inhibition, and %TCDD_{max}), and 3) benthic ecosystem recovery (MPB cell, bacterial community richness, and primary production). Each element was calculated using the ratio to negative control.

(Fig. 4b). After 90 d, total recovery efficiency reached 47% in the FMeM treatment, which was greatest among the biological treatments. In the previous study, as in one of the series of this study, a combination of microbes was effective for remediation of the sedimentary contamination by oil. Interestingly, "no treatment" showed comparable recovery to others, indicating natural attenuation can promote soft bottom benthic community health (Lee et al., 2019a). Alternatively, the combined use of emulsifiers reduced both potential toxicity and residual oil, but adversely affected marine benthic organisms (Lönning et al., 1976). Primary production was less in the mixed solution with emulsifier at 60 d compared to 0 d (Fig. S12). Results of a previous study demonstrated that primary producers are sensitive to biological treatments (Hsiao et al., 1978). In particular, potential toxic effects by dioxin-like substances would increase after implementing the techniques, resulting in negative effects of emulsifiers on benthic organisms, including primary producers (Couillard et al., 2005; Rahsepar et al., 2016). Unlike physical techniques, the poor efficiency for reducing the total amount of residual oil could be attributed to incomplete removal of the residual oil by the dilution of the mixed solution due to seawater inflow. Overall, the present results suggested that residual oil cannot be removed completely by a sole application of biological techniques, but it is desirable to use physical techniques prior to implementation of biological treatments (Fox, 1996).

3.4. Best available remediation techniques

Decision-making in response to spilled oil entails balancing economic constraints with the need to remove as much oil as possible from the spilled site while minimizing the environmental effects of the remediations used, thus optimizing environmental protection in the short and long term (Etkin, 2005). Natural attenuation is often as efficient as most active restoration alternatives and is cost-effective while minimizing the impacts of active remediation (Jahn and Robilliard, 1997). Results of the study presented here also indicated that no treatment was effective for long-term recovery of the area in which oil was spilled. While natural recovery has less effect on the environment compared to

active remediations, it would be difficult to implement in areas, which are more heavily affected by oil spills. Accordingly, natural recovery might be suitable for the areas exposed to small quantities of oil spills and high energy tides (Etkin, 2002). An appropriate remediation technique should be carefully selected in a way to promote both short- and long-term recoveries while securing the immediate remediation at golden time.

In order to evaluate the best available techniques, we considered three main criteria, including economic availability, environmental performance, and technical applicability. The three criteria were subdivided into a total of 9 factors (Table S9). For physical remediation, the criteria with greater scores were different from treatment by treatment (Fig. 5a and Table 2). NT scored great in the economic availability category (0.15), which focuses on the lesser cost of removing residual oil. Various physical techniques used for remediation of oil are effective in restoring benthic ecosystems, but seem to be relatively more expensive for operating them compared to NT. Based on performance, treatment MA showed the greatest score (0.30). While MA had relatively lesser scores for economic availability, it scored well for environmental performance and technical applicability. Therefore, in comprehensive consideration of all three categories, MA was evaluated as the BAT among physical techniques tested during the present investigation (Fig. 5a). The HW/HP treatment was ranked next to MA because of a lesser score for technical applicability.

Based on the MAUT analysis, FMeM treatment scored greater in all categories compared to other biological techniques (Fig. 5a and Table 1). Other techniques scored similarly in environmental performance and technical applicability (0.18–0.27), but FMeM scored the greatest in environmental performance (0.45) because of a quick reduction of oil. The NT scored great in economic availability (0.15) but little in environmental performance and technical applicability, because of its relatively poor ability to remove residual oil and may incur additional remediation cost. However, on exposed shorelines with high-energy tides, the majority of oil is expected to be cleared within a seasonal cycle. Natural cleaning is similar to flushing in principle, but relies on the natural energy of the waves to give far larger quantities of water

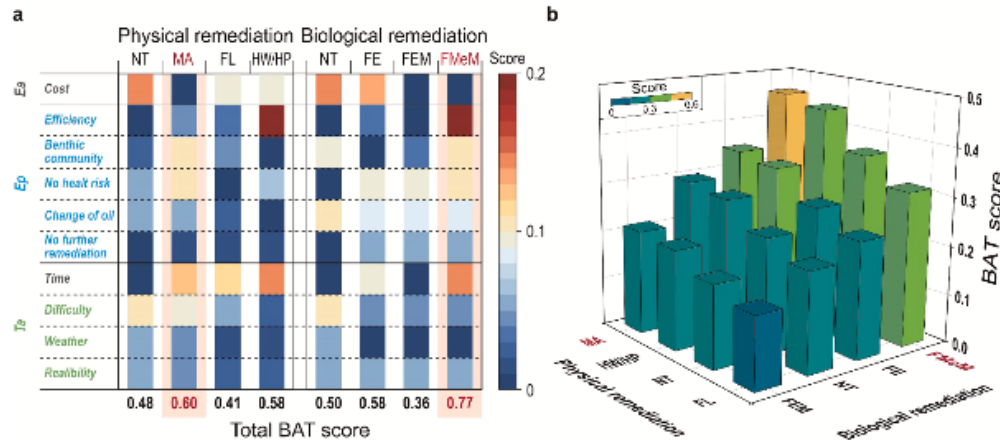


Fig. 5. Score diagram of the best available techniques (BATs). (a) Total score calculated from ten criteria using multi-attribute utility theory (MAUT) analysis for each technique. Ea: economic availability; Ep: environmental performance; Ta: technical applicability. (b) Evaluation of combined physical and biological remediation techniques based on multiplying each score in the oil spill simulation.

Table 2
Multi-attribute utility theory (MAUT) analysis for selecting the best available techniques for oil spill response.

Remediation techniques	Method	¹ Ea	Rank	² Ep	Rank	³ Ta	Rank	Ea+Ep	Rank	Ea+Ta	Rank	Ep+Ta	Rank	Ea+Ep+Ta	Rank
Physical	NT	0.15	1	0.13	3	0.20	4	0.28	3	0.35	1	0.33	3	0.48	3
	MA	0.00	4	0.30	1	0.30	1	0.30	2	0.30	4	0.60	1	0.60	1
	FL	0.09	2	0.11	4	0.21	2	0.21	4	0.30	2	0.32	4	0.41	4
	HW/HP	0.09	2	0.28	2	0.21	2	0.37	1	0.30	2	0.48	2	0.57	2
Biological	NT	0.15	1	0.15	4	0.20	3	0.30	3	0.35	2	0.35	4	0.50	3
	FE	0.14	2	0.18	3	0.27	2	0.31	2	0.40	1	0.45	2	0.58	2
	FEM	0.00	3	0.18	2	0.18	4	0.18	4	0.18	4	0.36	3	0.36	4
	FMeM	0.00	3	0.45	1	0.32	1	0.45	1	0.32	3	0.77	1	0.77	1

^a Ea (economic availability): cost (relatively inexpensive)

^b Ep (environmental performance): efficiency (95–99% removal rate of residual oil); health (reduction rate of potential toxicity and recovery of benthic community); change of oil (do not change physical/chemical characteristics of oil); necessity for further treatment (no further remediation required)

^c Ta (technical applicability): time (removal of contaminant within days); level of difficulty (easy to maintain and operate); weather (favorable for application of method); reliability (the method works the majority of the time)

than could be delivered by pumps. Future research is needed to settle the high-energy tide system in the mesocosm system, and determine its potential for removing oil. Overall, based on biological techniques tested, FMeM was deemed to be the BAT. However, these biological technologies do not rapidly remove a large amount of residual oil in a short-time period, so they need to be employed in conjunction with physical techniques (Zengel et al., 2015).

Assuming an oil spill occurred on a gravel shoreline, the BAT could be selected by multiplying each previously obtained score from the MAUT analysis (Fig. 5b). When evaluating various remediation techniques in this study, the most effective remediation for oil was calculated as "MA + FMeM", which scored 0.46. The "HW/HP + FMeM" received a comparable score of 0.44, but a penetration of washed oil into the substrate layer and thus long-term adverse effects on the benthic community would be required. While employing various remediation techniques in this study, although various other factors, including labor requirement, workplace safety, and the post management should be included in evaluating each technique, quantitative studies were insufficient to include all of them. Therefore, the result of this study may not be suitable to all oil spill situations.

Physical remediation is conducted to recover sedimentary contamination by oil at initial stage. Biological remediation is applied to promote health of benthic communities (Tuler et al., 2007). Physical and

biological remediation treatments should be applied differently depending on the habitat characteristics of the spilled site and it is recommended that the remediation technique suggested in this study would be applied to a gravel covered coast with an environmental sensitive index (ESI) of "6A" (Table S10) (Michel, 2013). When the oil spilled from sea is introduced to the coast, MA treatment proposed in this study can limit the spread of pollution by reducing the risk of oil landfilled in the coast by the wave or the wind (POSOW, 2013). In general, a combination of physical and biological techniques is well known to effectively remedy the oil spills (Byroade et al., 1981; Reed et al., 1995; Chen et al., 2019). According to the results of this study, the use of the initial implementation of MA and the use of FMeM treatment can promote the recovery of benthic community health avoiding further adverse effects. Further study to conduct the experiment as successive combining between physical and biological remediation is necessary for applying to in situ oil spill response. Final cleanup should be recommended to begin only as successive after the initial cleanup of the large-scale accumulated oil has been completed and all threats of new significant deposits have been removed (Venosa et al., 2004).

4. Conclusions

In conclusion, the present study successfully analyzed and

demonstrated the integrated aspects of the efficiency of various remediation techniques in relation to early and long-term recovery of a gravel shore. Much environmental and technical science research has been under taken recently to better understand the evaluation of efficiency in the physical and biological remediation techniques. For removing the residual oil more effectively and eco-friendly, application of appropriate remediation techniques to be suitable the targeted shoreline is required. The selection of the techniques cannot be determined unless considering economic availability, environmental performance, and technical applicability. With experimental results, further study of encompassing economic, social, technical, and environmental aspects is needed to oil contaminated shoreline. The results provide guidelines on the techniques best suited for recovering an oil-contaminated gravel shore while facilitating the recovery of adversely affected benthic ecosystems, elsewhere.

CRedit authorship contribution statement

Taewoo Kim: Conceptualization, Formal analysis, Statistical analyses, Visualization, Writing – original draft. **Changkeun Lee:** Conceptualization, Formal analysis, Investigation, Writing – review & editing. **Junghyun Lee:** Writing – review & editing, Data review, Formal analysis. **Hanna Bae:** Investigation, Formal analysis. **Junsung Noh:** Review & editing, Project administration. **Seongjin Hong:** Investigation, Project administration, Writing – review & editing. **Bong-Oh Kwon:** Investigation, Project administration, Funding acquisition. **Jae-Jin Kim:** Investigation, Data curation. **Un Hyuk Yim:** Investigation, Project administration. **John P. Giesy:** Investigation, Writing – review & editing. **Gap Soo Chang:** Investigation, Writing – review & editing. **Jong Seong Khim:** Conceptualization, Investigation, Statistical analyses, Visualization, Writing – review & editing, Project administration, Funding acquisition, Supervision.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

This work was supported by the projects entitled “Development of Advanced Science and Technology for Marine Environmental Impact Assessment (20210427)” funded by the Ministry of Oceans and Fisheries of Korea (MOF) granted to JSK. JPK was supported by the Canada Research Chair program, a Distinguished Visiting Professorship in the Department of Environmental Sciences, Baylor University in Waco, TX, USA.

Appendix A. Supporting information

Supplementary data associated with this article can be found in the online version at doi:10.1016/j.jhazmat.2022.128945.

References

- Adams, R.H., Dominguez-Rodriguez, V.I., Zavala-Cruz, J., 2015. *Vibrio fischeri* bioassay for determination of toxicity in petroleum contaminated soils from tropical southeast Mexico. *Sains Malays.* 44 (3), 337–346. <https://doi.org/10.17576/jsm-2015-4403-04>.
- Azabulike, C.C., Chikere, C.B., Okpokwasili, G.C., 2016. Bioremediation techniques-classification based on site of application: Principles, advantages, limitations and prospects. *World J. Microbiol. Biotechnol.* 32 (11), 1–18. <https://doi.org/10.1007/s11274-016-2137-x>.
- Bach, Q.-D., Kim, S.-J., Choi, S.-C., Oh, Y.-S., 2005. Enhancing the intrinsic bioremediation of PAH-contaminated anoxic estuarine sediments with biostimulating agents. *J. Microbiol.* 43 (4), 319–324, 38.
- Bae, H., Park, J., Ahn, H., Khim, J.S., Bae, H., Park, J., Ahn, H., Khim, J.S., 2020. Shift in benthic diatom community structure and salinity thresholds in a hypersaline environment of solar saltern, Korea. *Algae* 35 (4), 361–373. <https://doi.org/10.4490/algae.2020.35.12.4>.
- Bourlat, S.J., Borja, A., Gilbert, J., Taylor, M.I., Davies, N., Weisberg, S.B., et al., 2013. Genomics in marine monitoring: New opportunities for assessing marine health status. *Mar. Pollut. Bull.* 74 (1), 19–31. <https://doi.org/10.1016/j.marpolbul.2013.05.042>.
- Brils, J.M., Huwer, S.L., Kater, B.J., Schout, P.G., Harmsen, J., Delvigne, G.A., Scholten, M.C.T., 2002. Oil effect in freshly spiked marine sediment on *Vibrio fischeri*, *Corophium volutator*, and *Echinocardium cordatum*. *Environ. Toxicol. Chem.* 21 (10), 2242–2251. <https://doi.org/10.1002/etc.5620211031>.
- Byroade, J.D., Twedell, A.M., LeBoff, J.P., 1981. Handbook for oil spill protection and cleanup priorities. Municipal environmental research laboratory. Off. Res. Dev. 81.
- Chapman, P.M., 1990. The sediment quality triad approach to determining pollution-induced degradation. *Sci. Total Environ.* 97, 815–825. [https://doi.org/10.1016/0048-9697\(90\)90277-2](https://doi.org/10.1016/0048-9697(90)90277-2).
- Chapman, P.M., 1996. Presentation and interpretation of sediment quality triad data. *Ecotoxicology* 5, 327–339. <https://doi.org/10.1007/BF00119054>.
- Chen, J., Zhang, W., Wan, Z., Li, S., Huang, T., Fei, Y., 2019. Oil spills from global tankers: Status review and future governance. *J. Clean. Prod.* 227, 20–32. <https://doi.org/10.1016/j.jclepro.2019.04.020>.
- Cole, J.R., Wang, Q., Fish, J.A., Chai, B., McGarrell, D.M., Sun, Y., Brown, C.T., Porras-Alfaro, A., Kuske, C.R., Tiedje, J.M., 2014. Ribosomal database project: Data and tools for high throughput rRNA analysis. *Nucl. Acids Res.* 42 (D1), D633–D642. <https://doi.org/10.1093/nar/gkt338>.
- Couillard, C.M., Lee, K., Légaré, B., King, T.L., 2005. Effect of dispersant on the composition of the water-accommodated fraction of crude oil and its toxicity to larval marine fish. *Environ. Toxicol. Chem.* 24 (6), 1496–1504. <https://doi.org/10.1897/04-267r.1>.
- Das, N., Chandran, P., 2011. Microbial degradation of petroleum hydrocarbon contaminants: An overview. *Biotechnol. Res. Int.* <https://doi.org/10.1128/AEM.01474-06>.
- Dave, D., Ghaly, A.E., 2011. Remediation technologies for marine oil spills: A critical review and comparative analysis. *Am. J. Environ. Sci.* 7 (5), 423. <https://doi.org/10.3944/ajesp.2011.423.440>.
- De Vogelaere, A.P., Foster, M.S., 1994. Damage and recovery in intertidal *Fucus gardneri* assemblages following the Exxon Valdez oil spill. *Mar. Ecol. Prog. Ser.* 106 (3), 263–271. <https://doi.org/10.3354/meps106263>.
- Dhaka, A., Chattopadhyay, P., 2021. A review on physical remediation techniques for treatment of marine oil spills. *J. Environ. Manag.* 288, 112428. <https://doi.org/10.1016/j.jenvman.2021.112428>.
- Dubinsky, E.A., Conrad, M.E., Chakraborty, R., Bill, M., Borglin, S.E., Hollibaugh, J.T., Mason, O.U., Piceno, M., Reid, Y., Stringfellow, F.C., W. T., 2013. Succession of hydrocarbon-degrading bacteria in the aftermath of the deepwater horizon oil spill in the Gulf of Mexico. *Environ. Sci. Technol.* 47 (19), 10860–10867. <https://doi.org/10.1021/es401676y>.
- Edgar, R.C., 2010. Search and clustering orders of magnitude faster than BLAST. *Bioinformatics* 26 (19), 2460–2461. <https://doi.org/10.1093/bioinformatics/btq461>.
- Elkin, D.S., 2002. Presented at Arctic and Marine Oilspill Program (AMOP) Technical Seminar June. Analysis of Past Marine Oil Spill Rates and Trends For Future Contingency Planning.
- Elkin, D.S., Welch, J., 2005. Development of an oil spill response cost-effectiveness analytical tool. 28th Arctic and Marine Oilspill Program Technical Seminar. *Environ. Can.: Ott.* 889–922.
- Feng, J., Zeng, Y., Ma, C., Cai, X., Zhang, Q., Tong, M., Yu, B. P., X., 2006. The surfactant tension 80 enhances biodesulfurization. *Appl. Environ. Microbiol.* 72 (11), 7390–7393. <https://doi.org/10.1128/aem.01474-06>.
- Fox, R.D., 1996. Physical/chemical treatment of organically contaminated soils and sediments. *J. Air Waste Manag. Assoc.* 46 (5), 391–413. <https://doi.org/10.1016/j.marpolbul.2016.04.044>.
- Gao, C.H., Zekri, A., 2011. Applications of microbial-enhanced oil recovery technology in the past decade. *Energy Sources A: Recovery Util.* 33 (10), 972–989. <https://doi.org/10.1080/15567030903330793>.
- Hayes, M.O., Michel, J., Beisenbaugh, D.V., 2010. The intermittently exposed, coarse-grained gravel beaches of Prince William Sound, Alaska: Comparison with open-ocean gravel beaches. *J. Coast. Res.* 26 (1), 4–30. <https://doi.org/10.2112/08-1071.1>.
- Hong, S., Khim, J.S., Ryu, J., Park, J., Song, S.J., Kwon, B.-O., Choi, K., Ji, K., Seo, J., Lee, S., 2012. Two years after the Hebei Spirit oil spill: Residual crude-derived hydrocarbons and potential AhR-mediated activities in coastal sediments. *Environ. Sci. Technol.* 46 (3), 1406–1414. <https://doi.org/10.1021/es203491b>.
- Hook, S.E., Osborn, H.L., 2012. Comparison of toxicity and transcriptomic profiles in a diatom exposed to oil, dispersants, dispersed oil. *Aquat. Toxicol.* 124, 139–151. <https://doi.org/10.1016/j.aquatox.2012.08.005>.
- Hsiao, S.I., Kittle, D.W., Foy, M.G., 1978. Effects of crude oils and the oil dispersant Corexit on primary production of arctic marine phytoplankton and seaweed. *Environ. Pollut.* 15 (3), 209–221. [https://doi.org/10.1016/0013-9327\(78\)90066-6](https://doi.org/10.1016/0013-9327(78)90066-6).
- International Tanker Owners Pollution Federation Limited (ITOPF), 2011. Effects of oil pollution on the marine environment.
- Jahn, A.E., Robilliard, G.A., 1997. Natural recovery: A practical natural resource restoration option following oil spills. *International Oil Spill Conference* 665–668. <https://doi.org/10.7901/2169-3358-1997-1-665>.
- Johann, S., Nüller, L., Golen, M., Hollert, H., Seiler, T.B., 2020. Differences in biomarker and behavioral responses to native and chemically dispersed crude and refined fossil oils in zebrafish early life stages. *Sci. Total Environ.* 709, 136174. <https://doi.org/10.1016/j.chemosphere.2004.10.058>.

- Khim, J.S., Park, J., Song, S.J., Yoon, S.J., Noh, J., Hong, S., Kwon, B.-O., Ryu, J., Zhang, X., Wang, T., Lu, Y., Giesy, J.P., 2018. Chemical, site, and taxa-dependent benthic community health in coastal areas of the Bohai Sea and northern Yellow Sea: A sediment quality triad approach. *Sci. Total Environ.* 645, 743–752. <https://doi.org/10.1016/j.scitotenv.2018.07.169>.
- Kim, S.-J., Choi, D.H., Sim, D.S., Oh, Y.-S., 2005. Evaluation of bioremediation effectiveness on crude oil-contaminated sand. *Chemosphere* 59 (6), 845–852. <https://doi.org/10.1016/j.chemosphere.2004.10.058>.
- Kleindienst, S., Seidel, M., Ziervogel, K., Grim, S., Loftis, K., Harrison, S., Malkin, S.Y., Perkins, M.J., Field, J., Sogin, M.L., 2015. Chemical dispersants can suppress the activity of natural oil-degrading microorganisms. *Proc. Natl. Acad. Sci.* 112 (48), 14900–14905. <https://doi.org/10.1073/pnas.1507380112>.
- Lea-Smith, D.J., Biller, S.J., Davey, M.P., Cotton, C.A., Sepulveda, B.M.P., Turchyn, A.V., Scanlan, D.J., Smith, A.G., Chisholm, S.W., Howe, C.J., 2015. Contribution of cyanobacterial alkane production to the ocean hydrocarbon cycle. *Proc. Natl. Acad. Sci.* 112 (44), 13591–13596. <https://doi.org/10.1073/pnas.1507274112>.
- Lee, C., Kwon, B.-O., Hong, S., Noh, J., Lee, J., Ryu, J., Kang, S.-G., Khim, J.S., 2018a. Sub-lethal and lethal toxicities of elevated CO₂ on embryonic, juvenile, and adult stages of marine medaka *Oryzias latipes*. *Environ. Pollut.* 241, 586–595. <https://doi.org/10.1016/j.envpol.2018.05.091>.
- Lee, C., Hong, S., Noh, J., Lee, J., Yoon, S.J., Kim, T., Kim, H., Kwon, B.-O., Lee, H., Ha, S. Y., 2019a. Comparative evaluation of bioremediation techniques on oil contaminated sediments in long-term recovery of benthic community health. *Environ. Pollut.* 252, 137–145. <https://doi.org/10.1016/j.envpol.2019.05.100>.
- Lee, J., Kim, J.S., 2022. Revisited a sediment quality triad approach in the Korean coastal waters: Past research, current status, and future directions. *Environ. Pollut.* 29, 118262. <https://doi.org/10.1016/j.envpol.2021.118262>.
- Lee, J., Hong, S., Kwon, B.-O., Cha, S.A., Jeong, H.-D., Chang, W.K., Ryu, J., Giesy, J.P., Khim, J.S., 2018b. Integrated assessment of persistent toxic substances in sediments from Masan Bay, South Korea: comparison between 1998 and 2014. *Environ. Pollut.* 238, 317–325. <https://doi.org/10.1016/j.envpol.2018.02.064>.
- Lee, J., Kim, T., Yoon, S.J., Kim, S., Lee, A.H., Kwon, B.-O., Allam, A.A., Al-Khedhairi, A. A., Lee, H., Kim, J.-J., 2019b. Multiple evaluation of the potential toxic effects of sediments and biota collected from an oil-polluted area around Abu Ali Island, Saudi Arabia, Arabian Gulf. *Ecotoxicol. Environ. Saf.* 183, 109547. <https://doi.org/10.1016/j.ecoenv.2019.109547>.
- Lee, J.-S., Hong, S., Lee, J., Choi, T.S., Rhie, K., Khim, J.S., 2019c. Evaluation of residual toxicity of hypochlorite-treated water using bioluminescent microbes and microalgae: Implications for ballast water management. *Ecotoxicol. Environ. Saf.* 167, 130–137. <https://doi.org/10.1016/j.ecoenv.2018.10.002>.
- Li, P., Cai, Q., Lin, W., Chen, B., Zhang, B., 2016. Offshore oil spill response practices and emerging challenges. *Mar. Pollut. Bull.* 110 (1), 6–27. <https://doi.org/10.1016/j.marpolbul.2016.06.020>.
- Lönning, S., Hagström, B.E., 1976. Deleterious effects of Corexit 9527 on fertilization and development. *Mar. Pollut. Bull.* 7 (7), 124–127. [https://doi.org/10.1016/0025-326x\(76\)90197-1](https://doi.org/10.1016/0025-326x(76)90197-1).
- Love, C.R., Arrington, E.C., Gosselin, K.M., Reddy, C.M., Van Mooy, B.A., Nelson, R.K., Valentine, D.L., 2021. Microbial production and consumption of hydrocarbons in the global ocean. *Nat. Microbiol.* 6 (4), 489–498. <https://doi.org/10.1038/s41564-020-00859-8>.
- Martínez-Gómez, C., Vethaak, A.D., Hylland, K., Burgeot, T., Köhler, A., Lyons, B.P., Thain, J., Gubbins, M.J., Davies, I.M., 2010. A guide to toxicity assessment and monitoring effects at lower levels of biological organization following marine oil spills in European waters. *ICES J. Mar. Sci.* 67 (6), 1105–1118. <https://doi.org/10.1093/icesjms/fsq017>.
- Mearns, A.J., 1993. Recovery of Shoreline Ecosystems Following the Exxon Valdez Oil Spill and Subsequent Treatment. *Coastal Zone '93*. ASCE, pp. 466–479.
- Michel, J.J.M., Byron, L., 2013. Shoreline assessment manual, National Oceanic and Atmospheric Administration (NOAA), 2013. US Dep. Commer. 62.
- Mohr, S., Felbick, M., Ottenströer, T., Meinecke, S., Berghahn, R., Schmidt, R., 2005. Enhanced experimental flexibility and control in ecotoxicological mesocosm experiments: A new outdoor and indoor pond and stream system. *Environ. Sci. Pollut. Res.* 12 (1), 5–7. <https://doi.org/10.1065/espr2004.08.217>.
- Moore, J., 2016. Impacts of oil spills on shorelines. Good practice guidelines for incident management and emergency response personnel. IPECA.
- Nikolopoulos, M., Pasadakis, N., Kalogerakis, N., 2007. Enhanced bioremediation of crude oil utilizing lipophilic fertilizers. *Desalination* 211 (1–3), 286–295. <https://doi.org/10.1016/j.desal.2006.02.095>.
- Nixon, Z., Michel, J., 2018. A Review of distribution and quantity of lingering subsurface oil from the Exxon Valdez oil spill. *Deep Sea Res. Part II: Top. Stud. Oceanogr.* 147, 20–26. <https://doi.org/10.1016/j.dsr2.2017.07.009>.
- Paine, R.T., Ruesink, J.L., Sun, A., Soullard, E.L., Wonham, M.J., Harley, C.D., Brumbaugh, D.R., Secord, D.L., 1996. Trouble on oiled waters: Lessons from the Exxon Valdez oil spill. *Annu. Rev. Ecol. Syst.* 27 (1), 197–235. <https://doi.org/10.1146/annurev.ecolsys.27.1.197>.
- Patrick, R., Palavage, D.M., 1994. The value of species as indicators of water quality. *Proc. Acad. Nat. Sci. Phila.* 55–92.
- Perkins, R., Underwood, G., Brotas, V., Snow, G., Jesus, B., Ribeiro, L., 2001. Responses of microphytobenthos to light: Primary production and carbohydrate allocation over an emersion period. *Mar. Ecol. Prog. Ser.* 223, 101–112. <https://doi.org/10.1093/mar/gkt1244>.
- Pezeshki, S., Hester, M., Lin, Q., Nyman, J., 2000. The effects of oil spill and clean-up on dominant US Gulf coast marsh macrophytes: A review. *Environ. Pollut.* 108 (2), 129–139. [https://doi.org/10.1016/S0269-7491\(99\)00244-4](https://doi.org/10.1016/S0269-7491(99)00244-4).
- Preparedness off Oil-polluted Shoreline cleanup and Oiled Wildlife Interventions (POSOW), 2013. Oiled shoreline cleanup manual. centre of documentation. Res. Exp. Accid. Water Pollut.
- Procióp, L., 2020. Changes in microbial community in the presence of oil and chemical dispersant and their effects on the corrosion of API 5L steel coupons in a marine-simulated microcosm. *Appl. Microbiol. Biotechnol.* 104, 6397–6411. <https://doi.org/10.1007/s00253-020-10688-8>.
- Rahsepar, S., Smit, M.P., Murk, A.J., Rijnaarts, H.H., Langenhoff, A.A., 2016. Chemical dispersants: Oil biodegradation friend or foe? *Mar. Pollut. Bull.* 108 (1–2), 113–119. <https://doi.org/10.1016/j.marpolbul.2016.04.044>.
- Reed, M., Aamo, O.M., Daling, P.S., 1995. Quantitative analysis of alternate oil spill response strategies using OSCAR. *Spill Sci. Technol.* 2 (1), 67–74. [https://doi.org/10.1016/1353-2561\(95\)00020-5](https://doi.org/10.1016/1353-2561(95)00020-5).
- Sakshaug, E., Bricaud, A., Dandonneau, Y., Falkowski, P.G., Kiefer, D.A., Legendre, L., Morel, A., Parslow, J., Takahashi, M., 1997. Parameters of photosynthesis: Definitions, theory and interpretation of results. *J. Plankton Res.* 19 (11), 1637–1670. <https://doi.org/10.1093/plankt/19.11.1637>.
- Siva, J.L., 1979. Ecological impacts of oil spill cleanup: Are they significant? International Oil Spill Conference. American Petroleum Institute. 521–524. <https://doi.org/10.7901/2169-3358-1979-1-521>.
- Street, L., 2011. Containment and Recovery Field Guide A guide to containment and recovery operations at sea.
- Tremblay, J., Yergeau, E., Fortin, N., Cobanli, S., Elias, M., King, T.L., Lee, K., Greer, C. W., 2017. Chemical dispersants enhance the activity of oil-and gas condensate-degrading marine bacteria. *Microb. Ecol.* 11 (12), 2793–2808. <https://doi.org/10.1038/ismej.2017.129>.
- Tuler, S., Seager, T.P., Kay, R., Linkov, I., Figueira, J.R., 2007. Defining and selecting objectives and performance metrics for oil spill response assessment: A process design integrating analysis and deliberation. Durham, NH: Coastal Response Research Centre.
- United States Environmental Protection Agency Office of Emergency (EPA), 1993. Understanding oil spills and oil spill response. Vol. 9200.
- Uribe-Flores, M.M., Cerqueda-García, D., Hernández-Núñez, E., Cadena, S., García-Cruz, N.U., Trejo-Hernández, M.R., Aguirre-Macedo, M.L., García-Maldonado, J.Q., 2019. Bacterial succession and co-occurrence patterns of an enriched marine microbial community during light crude oil degradation in a batch reactor. *J. Appl. Microbiol.* 127 (2), 495–507. <https://doi.org/10.1111/jam.14307>.
- Valentine, D.L., Reddy, C.M., 2015. Latent hydrocarbons from cyanobacteria. *Proc. Natl. Acad. Sci.* 112 (44), 13434–13435. <https://doi.org/10.1073/pnas.1518485112>.
- Venosa, A.D., Zhu, X., Suldan, M., T., Lee K., 2004. Guidelines for the bioremediation of oil-contaminated salt marshes. United States Environmental Protection Agency (EPA), EPA/600/R-04-074. <https://doi.org/10.1201/b11002-5>.
- Walther III, H.R., 2014. Clean up techniques used for coastal oil spills: an analysis of spills occurring in Santa Barbara, California, Prince William Sound, Alaska, the Sea of Japan, and the Gulf Coast. Master's. Proj. Capstones 104.
- Wang, Z., Fingas, M., Li, K., 1994. Fractionation of a light crude oil and identification and quantitation of aliphatic, aromatic, and biomarker compounds by GC-FID and GC-MS, Part II. *J. Chromatogr. Sci.* 32 (9), 367–382. <https://doi.org/10.1093/chromsci/32.9.367>.
- Wardrop, J., 1991. Chemical dispersant use in oil spill management: Kill or cure? The controversy persists. *SPE Asia-Pac. Conf.* <https://doi.org/10.2118/22999-MS>.
- Yim, U.H., Hong, S.H., Shim, W., Oh, J., Chang, M., 2005. Spatio-temporal distribution and characteristics of PAHs in sediments from Masan Bay, Korea. *Mar. Pollut. Bull.* 50 (3), 319–326. <https://doi.org/10.1016/j.marpolbul.2004.11.003>.
- Yim, U.H., Ha, S.Y., An, J.G., Won, J.H., Han, G.M., Hong, S.H., Kim, M., Jung, J.-H., Shim, W.J., 2011. Fingerprint and weathering characteristics of stranded oils after the Hebei Spirit oil spill. *J. Hazard. Mater.* 197, 60–69. <https://doi.org/10.1016/j.jhazmat.2011.09.055>.
- Yim, U.H., Kim, M., Ha, S.Y., Kim, S., Shim, W.J., 2012. Oil spill environmental forensics: The Hebei Spirit oil spill case. *Environ. Sci. Tech.* 46 (12), 6431–6437. <https://doi.org/10.1021/es3004156>.
- Yim, U.H., Khim, J.S., Kim, M., Jung, J.-H., Shim, W.J., 2017. Environmental impacts and recovery after the Hebei Spirit Oil Spill in Korea. *Arch. Environ. Contam. Toxicol.* 73, 47–54. <https://doi.org/10.1007/s00244-017-0375-z>.
- Yim, U.H., Hong, S., Lee, C., Kim, M., Jung, J.-H., Ha, S.Y., An, J.G., Kwon, B.-O., Kim, T., Lee, C.-H., 2020. Rapid recovery of coastal environment and ecosystem to the Hebei Spirit oil spill's impact. *Environ. Int.* 136, 105438. <https://doi.org/10.1016/j.envint.2019.105438>.
- Zengel, S., Bernik, B.M., Rutherford, N., Nixon, Z., Michel, J., 2015. Heavily oiled salt marsh following the Deepwater Horizon oil spill, ecological comparisons of shoreline cleanup treatments and recovery. *Plos One* 10 (7), e0132324. <https://doi.org/10.1371/journal.pone.0132324>.
- Zheng, Z., Peters, G.M., Arp, H.P.H., Andersson, P.L., 2019. Combining in silico tools with multicriteria analysis for alternatives assessment of hazardous chemicals: A case study of decabromodiphenyl ether alternatives. *Environ. Sci. Technol.* 53 (11), 6341–6351. <https://doi.org/10.1021/acs.est.8b07163>.

